


NOTES:  
 01. FOOTING SIZES TO BE DETERMINED DURING TIME OF INSTALLATION. DEPTH OF FOOTING DETERMINED BY SOIL CONDITIONS / FROST LINE.

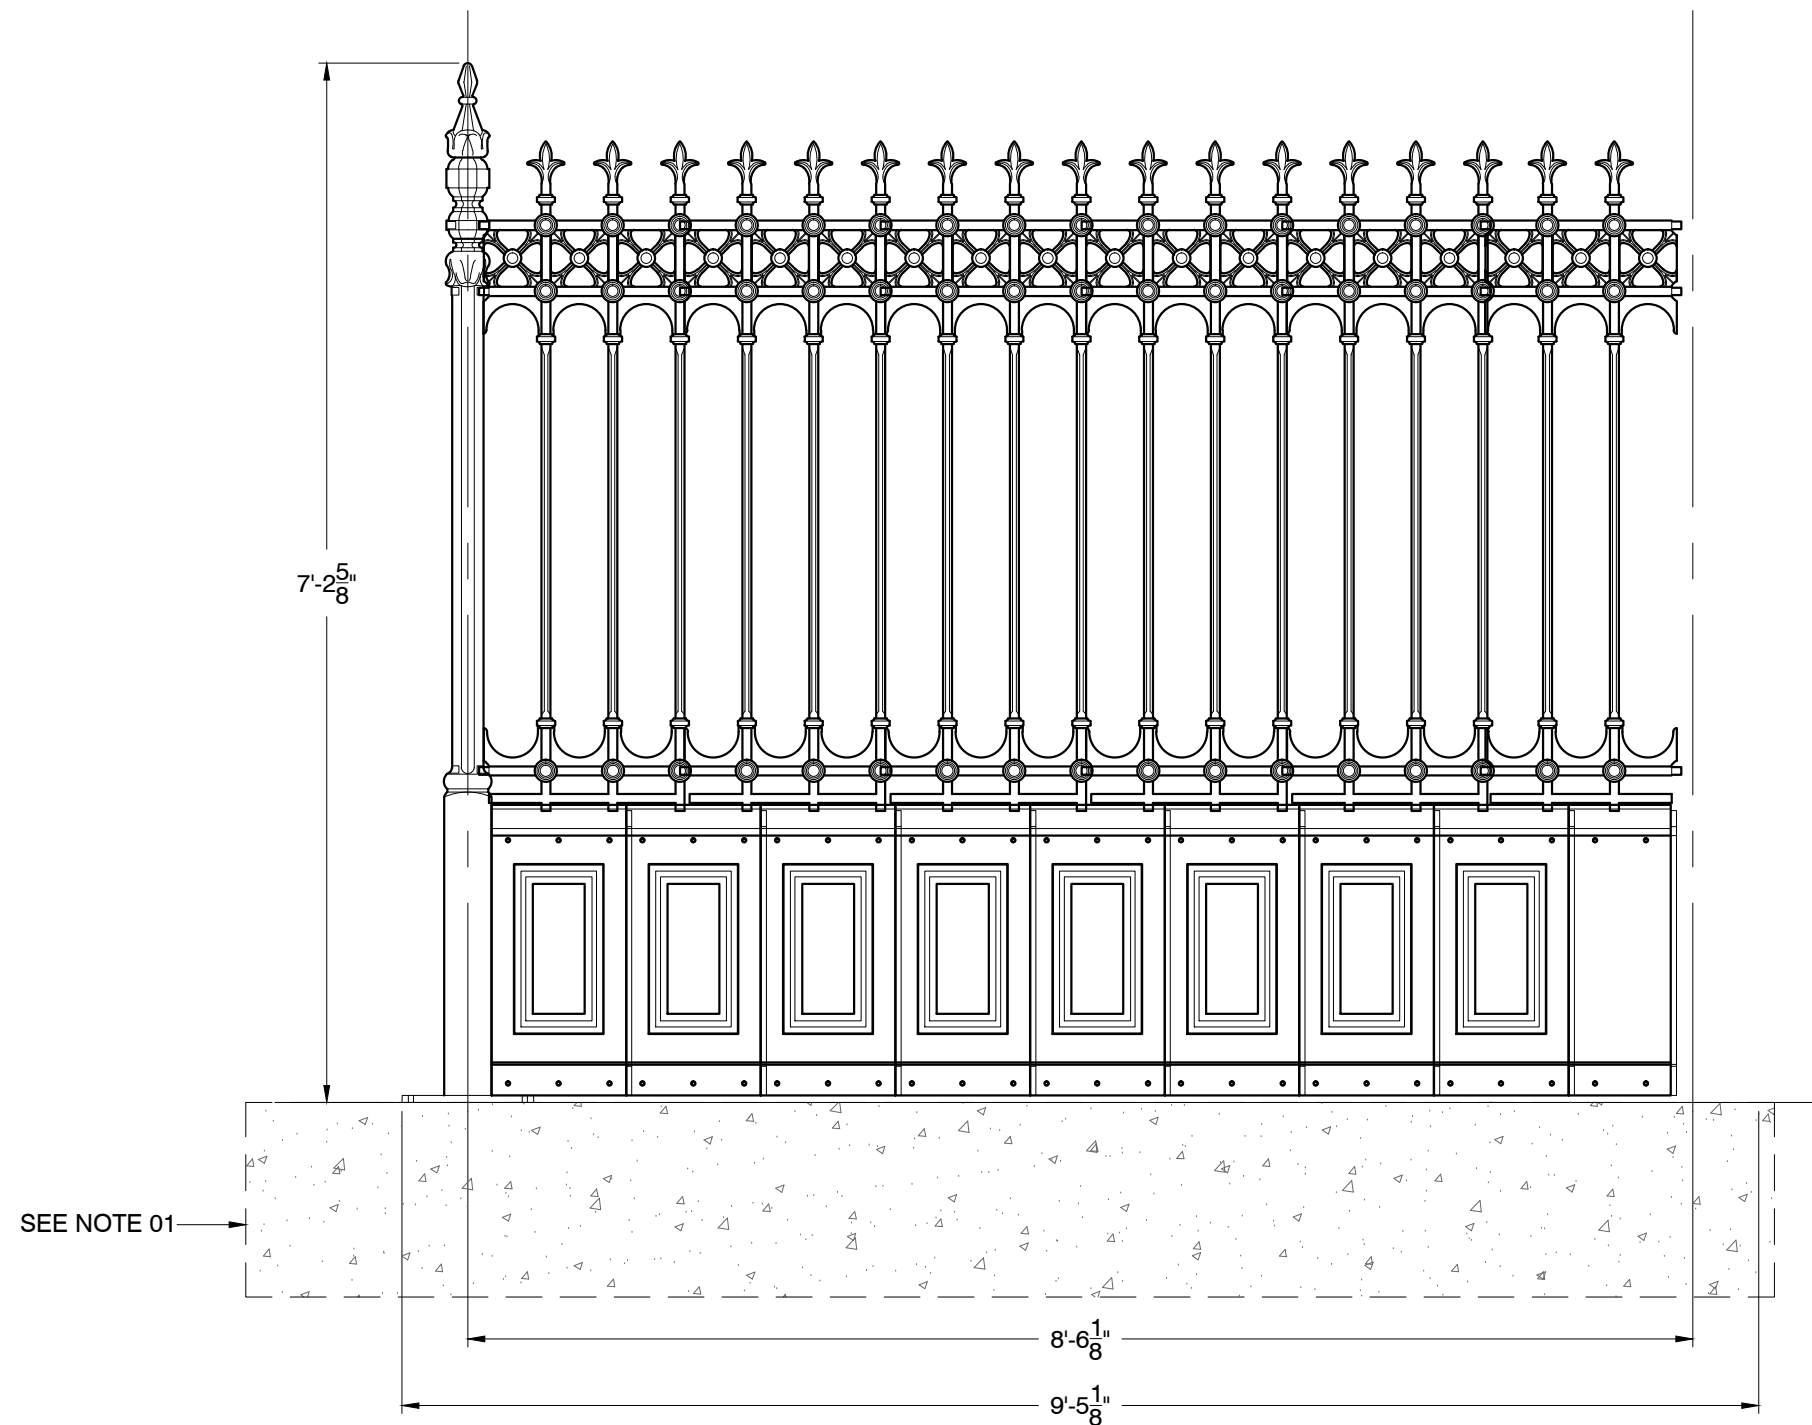

**Construction**  
 All railing, gates and posts are crafted in solid cast iron, and are modular in design for ease of installation.

**Finishing**  
 Components are provided with a rust-preventative universal primer basecoat, ready for application of final paint finish upon installation.

| Item # | Qty. | Description   | Weight           |
|--------|------|---|------------------|
| GA031  | 1    | Stirling Full Height Railing Post                         | 123 lbs          |
| GA118b | 5    | Stirling Half Height Railing Panel w/Cast Wall Top Fixing | 75 lbs Per Panel |
| GA120b | 1    | Stirling Half Height Joiner Panel w/Cast Wall Top Fixing  | 60 lbs Per Panel |
| GA170  | 16   | Cast Wall Panel   | 24 lbs Per Panel |
| GA171  | 2    | Cast Wall Panel Spacer                                    | 24 lbs Per Panel |

**Pricing**

MSRP: \$ 468.28 / Linear ft.

SCALE : 3/4"=1'-0"

**STIRLING  
GA118b**